

H4H QUICK SETUP GUIDE




DB44+DB26+Power harness



FRONT VIEW

www.mobilewitness.com
Email: support@saysecurity.com
Phone: 001-419-634-5788

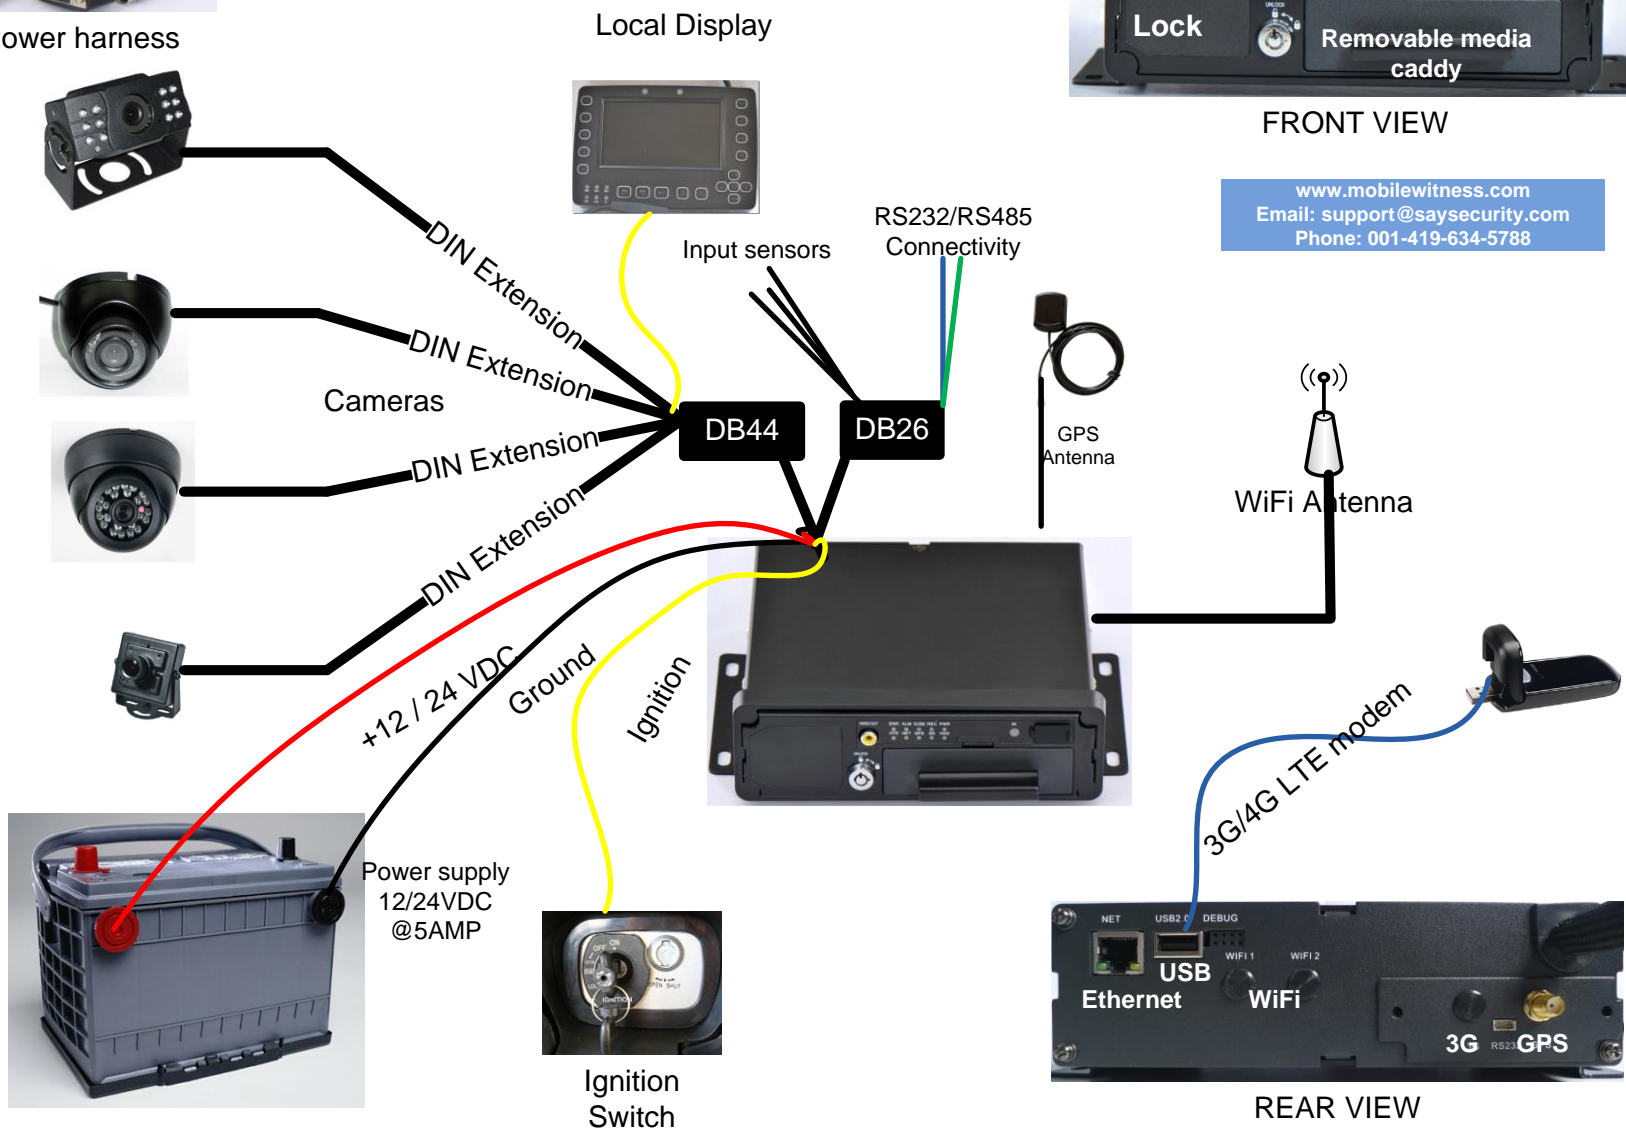

REAR VIEW

H4H QUICK SETUP GUIDE



GENERAL

● On/off type: **IGNITION OR TIMER**

Boot up time: **06:00:00**

Shut down time: **18:00:00**

Auto boot up on schedule: **OFF**

Shut down delay (1-300) min: **005**

USB auto-export Aspect mode: **4:3**

Alarm buzzer Transparency: **25%**

Exit menu on alarm Menu timeout: **300** sec

Allow USB keyboard

SAVE **EXIT**

SETUP→SYSTEM→GENERAL

DATE/TIME

● **12/18/2012** FORMAT: **MM/DD/YYYY** TUE

10:14:24 FORMAT: **24H**

● TIME SYNC SOURCE: **NTP**

TIME ZONE: **-5**

SYNC TIME: **06:30:00**

NTP SERVER IP: **149.20.54.20** **AUTO**

● DST: **ON** DST MODE: **AUTO**

2AM ON SECOND SUNDAY IN MARCH
2AM ON FIRST SUNDAY IN NOVEMBER

SAVE **EXIT**

SETUP→SYSTEM→DATE/TIME

VEHICLE INFO

● UNIT S/N: **0064002549**

● UNIT ID (00000-99999): **00000**

● COMPANY NAME: **SAYSG**

VEHICLE NO.: **HR4MRC**

DRIVER/ROUTE NAME: **ROJAS**

ID FOR MOBILELINK: **51144455**

SAVE **EXIT**

SETUP→SYSTEM→VEHICLE INFO

LOCAL NETWORK

● IP TYPE: **STATIC**

IP: **192.168.001.100**

SUB: **255.255.255.000**

GATE: **192.168.001.001**

● CLIENT PORT: **08080**

DNS SERVER: **255.255.255.255**

MAC ADDRESS: **90-F2-78-A5-37-31**

SAVE **EXIT**

SETUP→NETWORK→LAN

WIFI

WIFI ENABLE: **ON**

IP: **000.000.000.000**

SUB: **000.000.000.000**

GATE: **000.000.000.000**

ESSID: **[Empty]** ...

IP TYPE: **DHCP** SECURITY: **NONE**

SAVE **EXIT**

SETUP→NETWORK→WIFI

MOBILE NETWORK

CURRENT DEVICE: (none)

ENABLED **OFF**

PRESET **[Empty]** **Apply**

APN **[Empty]**

USERNAME **[Empty]**

PASSWORD **[Empty]**

ACCESS NO. **[Empty]**

SAVE **EXIT**

SETUP→NETWORK→MOBILE NETWORK

SERVER SETUP

● MOBILELINK SERVER

Network: **None** Address: **DNS** Port: **05600**

Host: **ml.mobilelinklive.com**

Reporting Interval Normal: **005** Alarm: **005**

● AUTO DOWNLOAD SERVER

Network: **None** Address: **IP** Port: **05601**

Host: **000.000.000.000**

Disable recording for download (high-speed mode)

Show progress on GUI

SAVE **EXIT**

SETUP→NETWORK→SERVERS

SERVER SETUP

● HEALTH MONITOR

Network: **LAN** Address: **DNS** Port: **00080**

Host: **app.fleetwitness.com** **TEST**

● REMOTE UPDATES

Network: **LAN** Port: **05602**

● CLIENT CONNECTION

Client Port: **04520** Require password

Legacy Port: **08080**

SAVE **EXIT**

SETUP→NETWORK→SERVERS

INBOUND PORTS:
TCP: 943
TCP: 4520

These are ports you need to route if (1) your MDVR is behind a router/firewall or NAT connection and (2) you need to get VIDEO from your MDVR using MobileLink or MWM.

www.mobilewitness.com
Email: support@saysecurity.com
Phone: 001-419-634-5788